ADVANCED SKID STEER BOOM ARM SYSTEM

RAPTOR

EQUIP YOUR BOOM ARM

Cyclone Mower Head	*ET-CY-48*
Sickle Mower Bar	*ET-BMS-XX*
Sidewinder	*ET-SW-36*
String Trimmer	*Inquire*

Shown with 36" Sidewinder Mower (ET-SW-36) mower head.

Shown with Sickle Bar (ET-BMS-70) mower head.

Shown with Cyclone (ET-CY-48) mower head.

USE WITH

SPECS (with Sidewinder Mower Head)	**RAPTOR BOOM ARM**	**REACH**	**APPROXIMATE**
Parked Dimensions (inches)	53" W / 68" L / 77" H	w/ 36" Flail Head	12.5' +
Max. Side Reach from Centerline (inches)	151	w/ 48" Rotary Head	14' +
Head Rotation	210º	w/ 5' Sickle Head	16' +
Max. Cut Height from Ground (inches)	120	w/ 7' Sickle Head	18' +
Max. Cut Depth from 60º Slope	56	w/ 9' Sickle Head	20' +
Arm Weight (LBS)	1,222		
Flow Rate (GPM)	17-25		
Max. Pressure (PSI)	3,500		

SKU: ET-RT-20

$ REQUEST A QUOTE

Contact us for custom machine applications

ETERRA

eterra-usa.com • sales@eterraattachments.com • 360.203.7730 • 2019

SICKLE BAR

*SICKLE BAR CUTTER
BOOM MOWER APPLICATION SHOWN

Experience superior reach and versatility for next-level roadside clearing with a Sickle Bar cutter. 150 degrees of cutting angle adjustment, including 45 degrees below grade will make your operation more nimble. Almost everything you wanted to cut with your Skid Steer is now in reach thanks to the Raptor Boom Arm.

Serrated 2″ Teeth and Blade Guards

Pitman/Gear Drive Systems

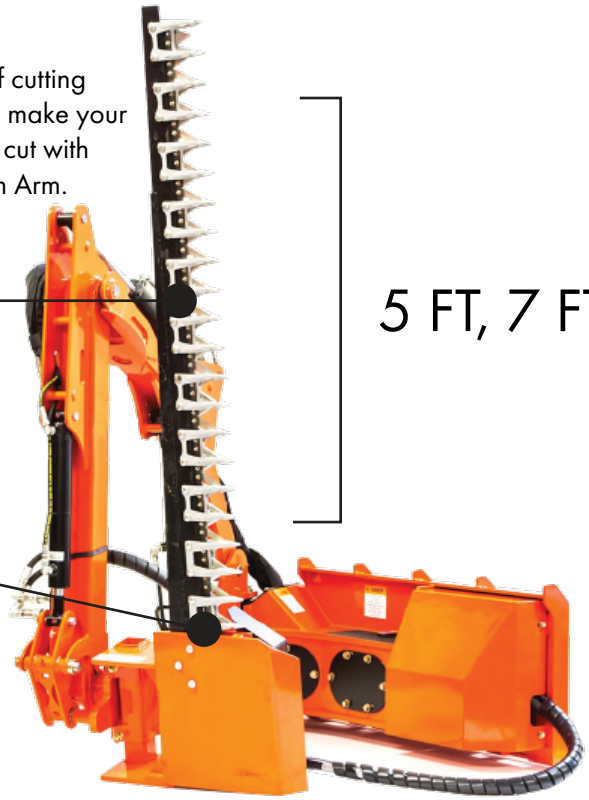

5 FT, 7 FT, 9 FT

MODELS

5 FT	*ET-BMS-50*
7 FT	*ET-BMS-70*
9 FT	*ET-BMS-90*

USE WITH



MODEL	5 FT	7 FT	9 FT
Length	60″	84″	108″
Overall Length	84″	108″	132″
Weight	225 Lbs	350 Lbs	400 Lbs
Drive System	Hydraulic Motor	Hydraulic Motor	Hydraulic Motor
Sickle Drive Systen	Pitman Arm	Gear Box	Gear Box
Cutting Capacity	Up to 2″	Up to 2″	Up to 2″
Flow Requirement	9 GPM - 22 GPM	12 GPM - 22 GPM	12 GPM - 22 GPM
Minimum Pressure	2250 PSI	2250 PSI	2250 PSI
Maximum Pressure	3500 PSI	3500 PSI	3500 PSI
Stock Motor	16 GPM	16 GPM	16 GPM

SKU: ET-SB-XX

21.5 FT. Reach with 9 FT. Sickle Bar (From Machine Center)

REQUEST A QUOTE

ETERRA

CYCLONE

*ROTARY MOWER HEAD
BOOM MOWER APPLICATION SHOWN

If clearing large material and removing lthe most vegetation with a single pass is what's required, the Cyclone is designed to do just that. Just a reminder, this is an open face cutter so use it with extreme caution.

Rotary Actuator provides 180 degrees of rotation and a 700 Lbs impact relief protection

Intelligent hose routing. Hoses and fittings are designed to reduce heat and keep you operating, not fixing hoses.

Interchange mower heads with Eterra's tube clamp system.

A wide motor selection makes it easy for you to select the best for your machine and line of work.

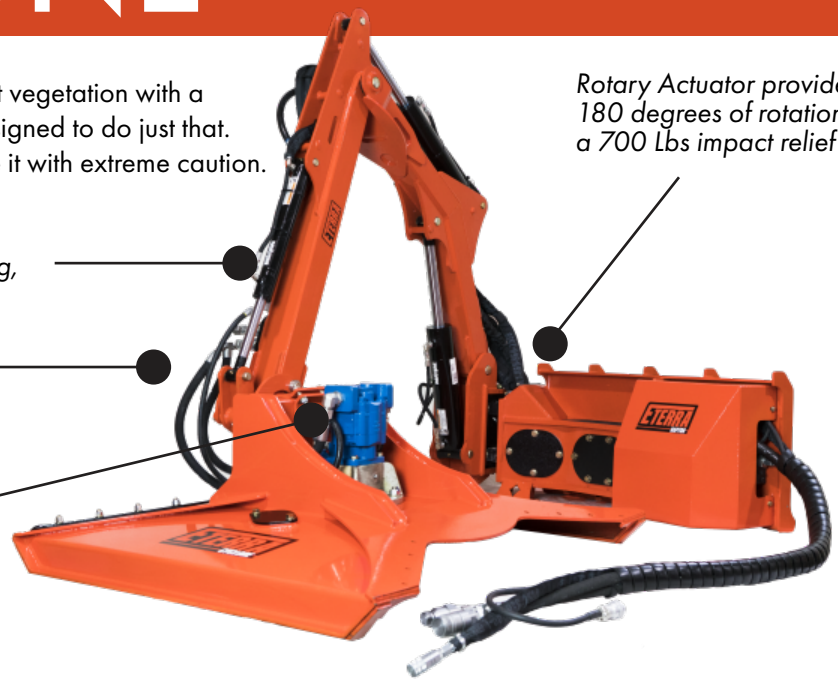

THE CYCLONE 48" ROTARY IS YOUR RAPTOR'S HEAVY MATERIAL MOWER HEAD

48"

USE WITH

MODEL	48"	60"
Weight	600 LBS	1,350 LBS
Cutting Path Width	48"	60"
Drive System	Direct Drive	
Skid Shoes	AR500 (Replaceable)	
Hydraulic Hoses	85" with 1/2" Flat Faced Couplers	
Cutting Capacity	Up To 6"	Up To 10"
Blades	2x9 LBS Forged	2x12 LBS Forged
Blade Bar	1" Thick T1	-
Hydr. Flow Requirement	15-40 GPM @ 3,000 PSI	25-40 GPM @ 3,000 PSI
Cutter Shaft Rotation Speed	1,300-1,500 RPM	

SKU: ET-CY-XX

REQUEST A QUOTE

SIDEWINDER

*FLAIL MOWER
BOOM MOWER APPLICATION SHOWN

A popular addition to the Raptor, the open-face and deep cutting design of this flail mower combines to tackle the toughest roadside applications. The Sidewinder mulches blackberry bushes, tall grass and brambles with ease so you can expect a perfect finish with one pass.

Full range of motion to right side of machine

Adjustable control valve block

Roller provides an even cut and smooth operation

THE SIDEWINDER 36" FLAIL IS YOUR RAPTOR'S LIGHT MATERIAL, BRUSH & GRASS MOWER

Besides roadways, you can clear paths, atv trails, fence lines and acreages.

USE WITH

MODEL	SIDEWINDER FLAIL MOWER
Weight	392 LBS
Width	50″
Depth	25.5″
Cutter Width	36″
Height	20″
Cutter Blades	20
Cutter Blade Weight	1 LBS
Cutter Retention	3/4″ Grade 8, Castle Nut Locked
Bearings	Self Aligning Spherical
Flow Rate	10 - 22 GPM

SKU: ET-SW-XX

REQUEST A QUOTE